

## Design

CLARON STYLE GP is designed with a symmetrical profile for Rod or Piston applications. The seal is a precision moulded Nitrile rubber with a fabric reinforced base to resist extrusion. Designed with initial radial interference to effect low-pressure sealing, the seal is progressively energised at higher pressures thereby increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear. Style GP is designed to provide effective low pressure sealing through distortion of the lips rather than "squeeze". This gives an improved response to pressure variations and reduces low pressure stiction to ensure a smoother return stroke.


## Operating Conditions

Maximum Pressure	
Max Speed	Temp. Range
m/s	-30°C to 100°C
<b>0.50</b>	250 Bar
<b>0.15</b>	400 Bar

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

### Maximum Diametral Clearance F

Pressure Bar

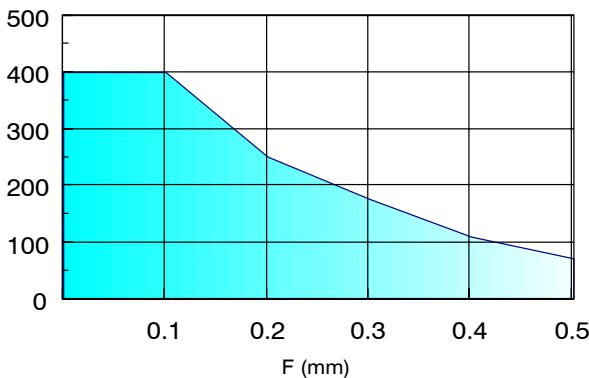

Continuous operating temperature for various Fluids

NBR Rubber		
DIN	Hydraulic Fluid Description	°C
H	Mineral oil without additives	100
H-L	Mineral Fluid with anti corrosion and anti ageing additives	100
H-LP	Mineral oil as HL plus additives reducing wear, raising load	100
H-LPD	Mineral oil as H-LP but with detergents and dispersants	100
H-V	Mineral oil as H-LP plus improved viscosity temp.	100
HFA E	Emulsions of mineral oil in water. Water content 80-95%	55
HFA S	Synthetic oil in water. Water content 80-95%	55
HFB	Emulsions of water in mineral oil. Water content 40%	60
HFC	Aqueous polymer solutions. Water content 35%	60
HFD R	Phosphoric acid ester based	NS
HFD S	Chlorinated hydrocarbon based	NS
HFD T	Mixtures of HFD R and HFD S	NS
HEPG	Polyglycol based	NS
HETG	Vegetable Oil based	60
HEES	Fully synthetic ester based	NS


**Note:** Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


## Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols. For Piston applications refer to section B.

## Fitting


For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

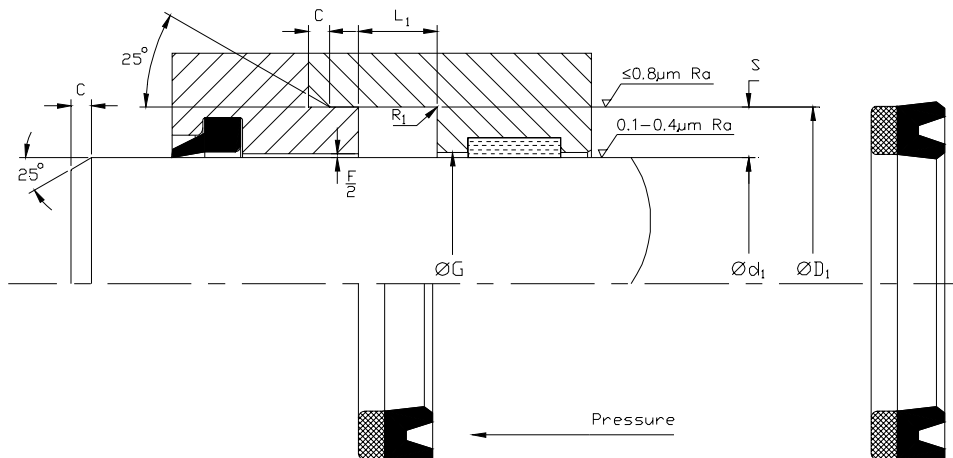



Nominal Dimensions & Machining Tolerances

Claron Part Number	Js 11	f8	H9	+0.25 -0.00	Nominal	Min	Max
	ØD <sub>1</sub>	Ød <sub>1</sub>	ØG	L <sub>1</sub>	S	C	R <sub>1</sub>
GP157118	40.00	30.00		7.00	5.00	2.50	0.40
GP196157	50.00	40.00		7.00	5.00	2.50	0.40
GP236196	60.00	50.00		7.00	5.00	2.50	0.40
GP279220	71.00	56.00		10.00	7.50	4.00	0.80
GP275236	70.00	60.00		7.00	5.00	2.50	0.40
GP314236	80.00	60.00		13.00	10.00	5.00	0.80
GP307248	78.00	63.00		10.00	7.50	4.00	0.80
GP334275	85.00	70.00		12.50	7.50	4.00	0.80
GP354275	90.00	70.00		13.00	10.00	5.00	0.80
GP393314	100.00	80.00		13.00	10.00	5.00	0.80
GP433354	110.00	90.00		13.00	10.00	5.00	0.80



Nominal Dimensions & Machining Tolerances

Claron Part Number	Js 11	f8	H9	+0.025 +0.015	Nominal	Min	Max
	$\varnothing D_1$	$\varnothing d_1$	$\varnothing G$	$L_1$	S	C	$R_1$
GP 150100	1.500	1.000		0.375	0.250	0.125	0.015
GP 200150	2.000	1.500		0.375	0.250	0.125	0.015
GP 200150/1	2.000	1.500		0.468	0.250	0.125	0.015
GP 212150	2.125	1.500		0.468	0.313	0.156	0.015
GP 237200/1	2.375	2.000		0.360	0.188	0.093	0.010
GP 262200/1	2.625	2.000		0.312	0.313	0.156	0.015
GP 300237	3.000	2.375		0.312	0.313	0.156	0.015
GP 325250/1	3.250	2.500		0.562	0.375	0.187	0.032